



CR3-KM 16A

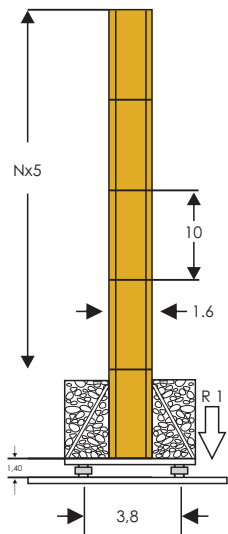


N	H1	25-50-55			R1	
4	40	60	65	62	118	
3	30	60	65	50	115	
2	20	60	65	45	112	
1	10	60	65	42	109	

SKM-16A

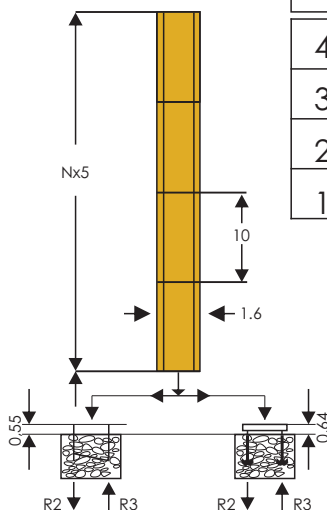


N	H1		R2	R3
4	39,2	48	89	65
3	29,2	45	57	32
2	19,2	42	48	24
1	9,2	39	41	19

CR3-KM 16A

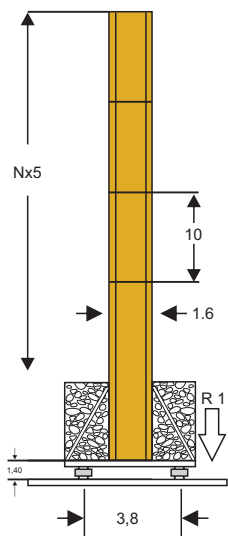






N	H1	25-50-55			R1	
4	40	60	65	62	118	
3	30	60	65	50	115	
2	20	60	65	45	112	
1	10	60	65	42	109	



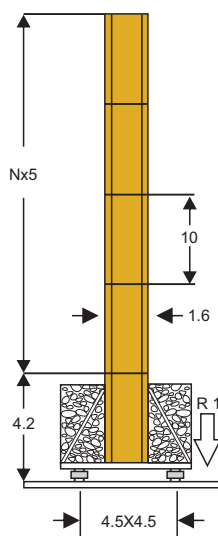






SKM-16A



N	H1		R2	R3
4	39,2	48	89	65
3	29,2	45	57	32
2	19,2	42	48	24
1	9,2	39	41	41

ANCLAJES AL



MECANISMOS				VELOCIDADES	T	m/min	CAPACIDAD	
ELEVACIÓN	33 PC 15/1	33	24		0 → 3 0 → 6	0 → 7 0 → 3,5	405 m	
					0 → 3 0 → 6	0 → 38,5 0 → 19		
					0 → 1,5 0 → 3	0 → 77 0 → 38,5		
	33 LVF 15	33	24		0 → 3 0 → 6	0 → 4,6 0 → 2,3	405 m	
					0 → 3 0 → 6	0 → 13 0 → 6,5		
					0 → 3 0 → 6	0 → 38,5 0 → 19	472 m	
					0 → 1,5 0 → 3	0 → 77 0 → 38,5		
	45 RCS 15	45	33		0 → 3 0 → 6	0 → 52,5 0 → 26	472 m	
					0 → 1,5 0 → 3	0 → 105 0 → 52		
Carro	4D3V3	4	3	3		15 - 30 - 58		
Orientación	RCV145	2 x 6	2 x 4,4			0 → 0,8 tr/min. rpm - u/min.		
Translación	Cr3	RT 224	2 x 4	2 x 3	1		25	
	R4-K 16 A	RT 324	2 x 7	2 x 5,2	2		12,5 - 25	
		TVC449ARC H 35,6m	4 x 6,8	4 x 5	2		10 - 50	
	R4R-K 16 A	RT 443 A1-2V	4 x 5	4 x 3,7	2		15 - 30	
		TVC 449 ARC H 35,6m	4 x 6,8	4 x 5	2		10 - 50	
	POTENCIA ELÉCTRICA NECESARIA		ALIMENTACIÓN 380 - 400 V RED - 50 HZ			33 PC 50 KVA	33 LVF 50 KVA	45 RCS 80 KVA
		GRUPO ELECTRÓGENO			CONSULTANOS			